PALMERA
FURNITURE



DYNAMIC 1

LAMINATE FLOORING

FSC
www.fsc.org
MIX
Holz aus verantwortungsvollen Quellen
FSC® C023682

BLAUER ENGEL
DAS UMWELTZEICHEN

Profile optimised for
12mm
10mm
panel thickness

1380 x 193 x 8 mm / 54.33 x 7.59 x 0.314”

8 mm

5G

clic

32

ABRASION CLASS
COMMERCIAL 32 / AC 4



Achat Oak - D2304







Beech Royal - D1407







Bourbon Oak - D2929








Hacienda Oak Beige - D2957







Borneo Teak - D2986

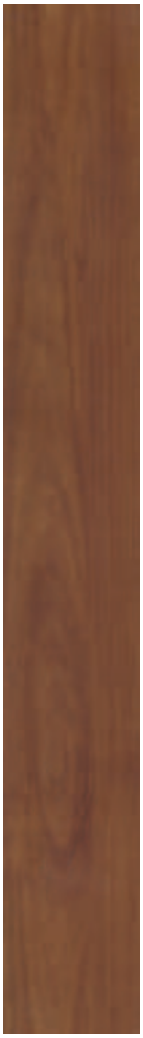





Cloud Oak - D3066





MADE IN GERMANY

DYNAMIC 1

LAMINATE FLOORING

TEST	CHARACTERISTICS	TEST METHOD
Formaldehyde emission	< 0.05 ppm	EN 717-1
Surface stain resistance	Grade 5, no visible changes to surface	EN 438-2.15
Lightfastness	≥ Level 6 Blue Wool Scale ≥ Level 4 Grey Scale	EN ISO 105-B02 EN 20 105-A02
Resistance to cigarette embers	Grade 4, no visible changes to surface	EN 438-2.18
Fire resistance	Ignites with difficulty, at least C_{fl}-s1	EN 13501-1
Height difference between connected elements	Average: ≤ 0.10 mm max: ≤ 0.15 mm	EN 13329
Edge straightness (bend)	≤ 0.3 mm/m	EN 13329
Openings between connected elements	Average: ≤ 0.15 mm max: ≤ 0.20 mm	EN 13329
Static indentation	< 0.01 mm - no visible changes, Impression in test with straight steel cylinder of 11.3 mm diameter	EN 433

THICKNESS	THERMAL CONDUCTIVITY (W/ (m x K))	OVERALL HEAT TRANSFER COEFFICIENT THERMAL RESISTANCE ((m² x K) / W)
8 mm	0.13	0.06

LENGTH	WIDTH	PANELS PER BOX	m²/BOX	BOXES PER PALLET	m² / PALLET
1380 mm	193 mm	8	2.131	56	119.320

Profile optimised for 12 mm 10 mm Panel thickness

CE EN 14041

BLUE ANGEL THE GERMAN ECO-LABEL www.blauer-engel.de/uz176

THIRD-PARTY VERIFIED EPD Institut Bauen und Umwelt e.V. EPD of the EPLF industry association

FSC www.fsc.org FSC® C023662 The mark of responsible forestry

EPLF Quality and Innovation made in Europe

floor score CERTIFIED BY SCS Global Services

PALMERA FURNITURE